



Requirement Plan

Plan Name: LTEOTADM Requirement Plan

Plan Id: LTEOTADM

Version Number: 28

Release Date: February 2019

Target Release Date: February 2019

This document provides initial information related to Verizon Wireless Long Term Evolution (LTE) LTE 3GPP OTADM requirement document. All information herein is subject to change without notice. The information provided was considered technically accurate at the time the documents were developed, but Verizon Wireless disclaims and makes no guaranty or warranty, express or implied, as to the accuracy or completeness of any information contained or referenced herein. VERIZON WIRELESS DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. Verizon Wireless is not providing any license necessary to access or utilize any source materials referenced herein. It shall be the responsibility of the developer to obtain any such licenses, if necessary.

The developer of any device, service or product for use on the Verizon Wireless network assumes all risks related to the development of such device, service or product. Verizon Wireless does not guarantee or warrant the availability of its network or the compatibility of its network with any device, service or product. Verizon Wireless disclaims liability for any damages or losses of any nature whatsoever whether direct, indirect, special or consequential resulting from the use of or reliance on any information contained or referenced herein.

1	LTE OTA DM VZ_REQ_LTEOTADM_65	6
1.1	INTRODUCTION VZ_REQ_LTEOTADM_2395	11
1.1.1	APPLICABILITY VZ_REQ_LTEOTADM_2396	11
1.1.2	3GPP Specifications VZ_REQ_LTEOTADM_7654	11
1.1.3	GLOSSARY/DEFINITIONS/ACRONYMS VZ_REQ_LTEOTADM_2398	11
1.1.4	REQUIREMENTS LANGUAGE VZ_REQ_LTEOTADM_2399	12
1.1.5	DEPLOYMENT PLANS VZ_REQ_LTEOTADM_2400	13
1.2	HARDWARE SPECIFICATIONS VZ_REQ_LTEOTADM_2401	13
1.2.1	MECHANICAL VZ_REQ_LTEOTADM_2402	13
1.2.2	ELECTRICAL VZ_REQ_LTEOTADM_2403	13
1.3	USER EXPERIENCE AND INTERACTIONS VZ_REQ_LTEOTADM_2404	13
1.3.1	User Experience (Device) VZ_REQ_LTEOTADM_7655	14
1.3.1.1	INTERRUPTIONS DURING APN MANAGEMENT ACTIVITY VZ_REQ_LTEOTADM_2405	14
1.3.1.1.1	LTE Network (Bearer) Available VZ_REQ_LTEOTADM_7656	14
1.3.1.1.2	Client Server Connection Failure During The SDM Session VZ_REQ_LTEOTADM_7657	14
1.3.1.1.3	DM Fatal Error VZ_REQ_LTEOTADM_22978	15
1.3.1.1.4	Accessory Interaction (Applicable on to Handset form Factor Devices) VZ_REQ_LTEOTADM_7658	15
1.3.1.2	Subscriber Device Management VZ_REQ_LTEOTADM_7659	15
1.3.1.3	Network Initiated SDM Sessions VZ_REQ_LTEOTADM_7660	15
1.3.2	USER INTERFACE (DEVICE) VZ_REQ_LTEOTADM_2406	15
1.3.2.1	Network Initiated SDM Session VZ_REQ_LTEOTADM_7661	15
1.3.2.2	User Initiated SDM Session – Manual PDN Name Change VZ_REQ_LTEOTADM_7662	16
1.3.2.2.1	Instructions VZ_REQ_LTEOTADM_7663	16
1.4	OTA-DM SPECIFICATIONS VZ_REQ_LTEOTADM_2407	16
1.4.1	COMMON REQUIREMENTS FOR OTADM - STANDARDS COMPLIANCE VZ_REQ_LTEOTADM_2408	16
1.4.1.1	COMPLIANCE WITH VZW REQUIREMENTS VZ_REQ_LTEOTADM_22979	16
1.4.1.1.1	OTHER INDUSTRY STANDARDS VZ_REQ_LTEOTADM_22980	17
1.4.1.1.2	OMA Standards Compliance VZ_REQ_LTEOTADM_7664	17
1.4.1.2	OTADM CLIENT VZ_REQ_LTEOTADM_22981	18
1.4.1.2.1	OTADM CLIENT PROVISIONING VZ_REQ_LTEOTADM_22982	18
1.4.1.2.1.1	Factory Bootstrapping VZ_REQ_LTEOTADM_7699	19
1.4.1.2.1.2	PDN Provisioning for OTADM Device Management Traffic VZ_REQ_LTEOTADM_7701	19
1.4.1.2.2	OTA-DM (Emergency Mode) VZ_REQ_LTEOTADM_5965111	19
1.4.1.3	OTADM TRANSPORT SECURITY REQUIREMENTS VZ_REQ_LTEOTADM_22983	20
1.4.1.3.1	Confidentiality (Data Encryption) VZ_REQ_LTEOTADM_7703	20
1.4.1.3.1.1	Root Certificate requirements VZ_REQ_LTEOTADM_36249	20

1.4.1.3.2 AUTHENTICATION VZ_REQ_LTEOTADM_22984.....	21
1.4.1.3.2.1 Package 0 Authentication (Notification Initiation Session Message) VZ_REQ_LTEOTADM_7705.....	21
1.4.1.3.2.2 Mutual Authentication VZ_REQ_LTEOTADM_7707	22
1.4.1.3.2.3 Failed Authentication Attempt Handling VZ_REQ_LTEOTADM_7665.....	22
1.4.1.3.2.4 Authentication Key VZ_REQ_LTEOTADM_7666.....	22
1.4.1.3.3 Integrity VZ_REQ_LTEOTADM_7667	22
1.4.1.3.4 OTA Device Management Tree Support VZ_REQ_LTEOTADM_7668	23
1.4.1.3.4.1 Commands VZ_REQ_LTEOTADM_7669	23
1.4.1.3.4.2 Correlator ID VZ_REQ_LTEOTADM_38690	23
1.4.1.3.5 ACCESS CONTROL LIST (ACL) VZ_REQ_LTEOTADM_22985 ..	23
1.4.1.3.6 Verizon Wireless Defined Base DM Tree VZ_REQ_LTEOTADM_7670	23
1.4.1.3.7 DMAcc Subtree VZ_REQ_LTEOTADM_7671	24
1.4.1.3.8 DevInfo Subtree VZ_REQ_LTEOTADM_7672	25
1.4.1.3.9 DevDetail Subtree VZ_REQ_LTEOTADM_7673	26
1.4.1.3.10 NAI VZ_REQ_LTEOTADM_5965085	26
1.4.1.4 DM CONNECTIVITY REQUIREMENTS VZ_REQ_LTEOTADM_22986	26
1.4.1.4.1 NETWORK INITIATED DM SESSIONS VZ_REQ_LTEOTADM_22988	26
1.4.1.4.1.1 DM Notification via SMS message (Trigger) VZ_REQ_LTEOTADM_7708.....	27
1.4.1.4.1.2 LTE Service RequiredVZ_REQ_LTEOTADM_7674.....	27
1.4.1.4.1.3 Network Initiated (NI) Retry VZ_REQ_LTEOTADM_7675	27
1.4.1.4.2 USER INITIATED DM SESSIONS VZ_REQ_LTEOTADM_22989 ..	27
1.4.1.4.2.1 Manual PDN ChangeVZ_REQ_LTEOTADM_7676	27
1.4.1.4.2.2 LTE Service RequiredVZ_REQ_LTEOTADM_7677.....	27
1.4.1.4.2.3 XML ELEMENTSVZ_REQ_LTEOTADM_22990	28
1.4.1.4.2.4 VZ_REQ_LTEOTADM_7678	28
1.4.1.4.2.5 Elements and Formatting VZ_REQ_LTEOTADM_7679.....	28
1.4.1.4.3 SUPPORT FOR IPV6 CONNECTIVITY VZ_REQ_LTEOTADM_31775	28
1.4.1.4.3.1 IPv6 Connection VZ_REQ_LTEOTADM_31776	28
1.4.1.4.3.2 Connection Setup Failure VZ_REQ_LTEOTADM_31777	29
1.4.1.4.3.3 Connection Failure During a DM SessionVZ_REQ_LTEOTADM_31778	29
1.4.1.5 OMA-DM TREE AND STANDARD COMMANDS VZ_REQ_LTEOTADM_22992.....	29
1.4.1.5.1 APN MANAGEMENT VZ_REQ_LTEOTADM_22993	29
1.4.1.5.1.1 MOBILE AUTOMATIC DEVICE DETECTION (ADD): BACKGROUND AND DESCRIPTION VZ_REQ_LTEOTADM_22994	30
1.4.1.5.1.2 ADD Flow Requirements VZ_REQ_LTEOTADM_7683	30
1.4.1.5.1.3 APN SERVICE AVAILABILITYVZ_REQ_LTEOTADM_22995 ..	31
1.4.1.5.1.4 INFORMATIONAL BACKGROUND VZ_REQ_LTEOTADM_22996.....	31

1.4.1.5.1.5	Service Availability for APN Parameter ChangesVZ_REQ_LTEOTADM_7688	31
1.4.1.5.1.6	ADD FLOW DIAGRAM VZ_REQ_LTEOTADM_22998	32
1.4.1.5.1.7	APN Management after SIM change VZ_REQ_LTEOTADM_8312636	34
1.4.1.5.2	Connectivity Management VZ_REQ_LTEOTADM_7684	34
1.4.1.5.2.1	ConnMO Replace Command - Values not case sensitive VZ_REQ_LTEOTADM_7685	37
1.4.1.5.3	Functionality For Device Connectivity Management VZ_REQ_LTEOTADM_7686	37
1.4.1.5.3.1	APN Name Format VZ_REQ_LTEOTADM_7702	38
1.4.1.5.3.2	APN ID VZ_REQ_LTEOTADM_7687	38
1.4.1.5.3.3	APN Name VZ_REQ_LTEOTADM_7689	38
1.4.1.5.3.4	IP VZ_REQ_LTEOTADM_7690	38
1.4.1.5.3.5	Enabled VZ_REQ_LTEOTADM_7691	38
1.4.1.5.3.6	IMS Domain VZ_REQ_LTEOTADM_7692	39
1.4.1.5.3.7	SIP T1 TimerVZ_REQ_LTEOTADM_7693	39
1.4.1.5.3.8	SIP TF TimerVZ_REQ_LTEOTADM_7694	39
1.4.1.5.3.9	SIP T2 TimerVZ_REQ_LTEOTADM_7695	39
1.4.1.5.3.10	SMS FormatVZ_REQ_LTEOTADM_7696	39
1.4.1.5.3.11	Enable VZ_REQ_LTEOTADM_7697	39
1.4.1.5.3.12	Disable VZ_REQ_LTEOTADM_7698	40
1.4.1.5.3.13	Disable TestingVZ_REQ_LTEOTADM_7715	40
1.4.1.5.3.14	IP Indication for SMS VZ_REQ_LTEOTADM_23000	40
1.4.1.5.3.15	Factory Rest & Default APN values: Class 2 DisableVZ_REQ_LTEOTADM_7709	40
1.4.1.5.3.16	Functionality for Data Retry Connectivity Management ObjectsVZ_REQ_LTEOTADM_26496	41
1.4.1.5.3.17	MAX_CONN_TVZ_REQ_LTEOTADM_26500	41
1.4.1.5.3.18	MAX_CONNVZ_REQ_LTEOTADM_26502	41
1.4.1.5.3.19	WAIT_TIMEVZ_REQ_LTEOTADM_26505	42
1.4.1.5.3.20	Factory Reset & Default APN values: Class 3 VZ_REQ_LTEOTADM_38539	42
1.4.1.6	Configuration Update VZ_REQ_LTEOTADM_7332288	42
1.4.2	SDM REQUIREMENTSVZ_REQ_LTEOTADM_2409	42
1.4.3	Firmware Over The Air (FOTA) VZ_REQ_LTEOTADM_37788	43
1.4.4	SUPPORT FOR INDUSTRY STANDARDS AND VERIZON WIRELESS REQUIREMENTS VZ_REQ_LTEOTADM_22991	43
1.4.4.1	OMA Defined Managed ObjectsVZ_REQ_LTEOTADM_7680	43
1.4.4.1.1	Update Result Reporting VZ_REQ_LTEOTADM_7681	43
1.4.4.1.2	Update - Fatal Error VZ_REQ_LTEOTADM_7682	43
1.5	DEVINFO SUBTREE EXTENSION VZ_REQ_MMOTADM_3103	43
1.5.1	ICCID Extended Node Support VZ_REQ_MMOTADM_8081	44
1.5.1.1.1.1	./DevInfo/Ext/ICCID	44

1.5.2	Device Functionality VZ_REQ_MMOTADM_8083.....	44
1.6	INFORMATION AND USE CASES VZ_REQ_LTEOTADM_2410.....	45
1.6.1	APN CLASS USAGE - INFORMATIONAL VZ_REQ_LTEOTADM_2411	45
1.6.1.1	CLASS 1 (APN 1)VZ_REQ_LTEOTADM_23001.....	45
1.6.1.2	CLASS 2 (APN 2)VZ_REQ_LTEOTADM_23002.....	45
1.6.1.3	CLASS 3 (APN 3)VZ_REQ_LTEOTADM_23003.....	46
1.6.1.4	CLASS 4 (APN 4)VZ_REQ_LTEOTADM_23004.....	46
1.7	REFERENCES VZ_REQ_LTEOTADM_2412	46

1 **LTE OTA DM** VZ_REQ_LTEOTADM_65

Revision History		
Author	Description of Changes	Date
Verizon Wireless	Version 1.0: Initial version	11/12/2009
Verizon Wireless	Version 2.0: 1.) Section 4.1.3.2.2 Information on Certificates added.	12/17/2009
Verizon Wireless	Version 3.0: 1. Added requirements for handset form factor devices. 2. Added user initiated device management requirements. 3. Updates to section 4.3.	02/11/2010
Verizon Wireless	Version 4.0: 1. Added IMS node. 2. Modified References 3. High Severity changed to Mandatory and Low to Optional	03/25/2010
Verizon Wireless	Version 5.0: 1. Changed server password in DMAcc Subtree. 2. Changed APN inactivity timer from infinity to 130min. 1. Changes server domain for LTE devices 2. Minor clarifications	06/25/2010
Verizon Wireless	Version 6.0: 1. Updated to Release 9 (1.2) changed SMS format from optional to mandatory (4.1.1.2), 2. Updated RSSI nodes on DiagMon (4.3.2.2), 3. Added APN operation nodes for ConnMO (4.3.2.3), 4. Clarifications on auth key (4.1.3.3.2),	12/17/2010

	5. Added XML Element for LocURI (4.1.5.2.5), 6. Changed "paired mode" to "discovery mode" (4.3.2.1)	
Verizon Wireless	Version 7.0: 1. Added DM Commands Functionality (4.3.2), 2. Point APNs Factory Provisioning requirements (4.1.3.1); 3. Added a column of value type in all DM tree nodes (4.3.2), 4. Clarified device password (4.1.3.3.2), 5. Added IMEI definitions to glossary (1.3), 6. Removed some LAWMO nodes not currently required (4.3.2.7); 7. Added references (Chapter 5), 8. Removed timer for optional download (3.1.1.1) 9. Duplicated /operation nodes for all APNs, added "secs" to some timer nodes (4.2.3.5) 10. Added connMO nodes replace command requirement (4.3.2.5.1).	02/2011
Verizon Wireless	Version 8.0: 1. Clarified APN Inactivity Timer unit. (4.3.2.6) 2. Added APN status node (4.3.2.5, 4.3.2.6) 3. Added GPS nodes for Android OS devices (4.3.2.1) and their associated function descriptions (4.3.2.2.2.1).	03/2011
Verizon Wireless	Version 9.0: 1. Changed DevID to DevId (4.1.4.5), 2. Changed home domain name to vzims.com (4.2.2.2) 3. Added root certification information (4.1.3.2.2) 4. Updated DevDetail node (4.1.4.6)	06/2011

	8. Added notes to domain name format (4.1.3.1) 9. Added ADD feature and flow chart (4.3.2.7) 10. Removed glossary terms : DMA, DiagMon, DCMO, FOTC 11. Removed User Experience sections, except interruption Requirements (3.1) 12. Removed Add/Copy/Delete command types (4.1.4.1) 13. Removed "multiple DMAcc are required (4.1.4.4) 14. Removed managed applications (4.1.4.8) 15. Removed DCMO, LAWMO, DiagMon, FOTA throughout the document 16. Added software version note (4.1.4.6) 17. Removed non-factory bootstrapping (4.1.3.1) 18. Added APN management requirements (4.2.2.1)	
Verizon Wireless	Version 10.0: 1. General cleanups on inconsistencies and ambiguities, 2. Clarify AAuth name format (4.1.4.4) 3. Added Chapter 5 Information and Use Cases, 4. Removed APN Inactivity Timer (4.1.5, 4.2) 5. APN Id command changed to read only (4.2.2.2) 6. Added deployment plan section	09/2011
Verizon Wireless	Version 11.0: Added requirements to have capabilities/tools available to restore Enable a Class 1 or Class 2 APN once Disabled, for OTADM IOT testing purposes	12/2011
Verizon Wireless	Version 12.0: Removed requirements for Digital Signature	4/2012
Verizon Wireless	Version 13.0: Clarification on SMS over IMS	6/2012

Verizon Wireless	Version 14.0: 1. Removed Package 0 SMS message requirements 2. Removed references to Client Initiated Sessions 3. Updated SIP Session Timer values	10/8/2012
Verizon Wireless	Version 15.0: Added IPv6 connectivity support requirements Added APN Data Retry parameter nodes Corrected SIP Timer format from int to float Class1 APN should be replaceable IP Support for APN shall report IPv4 and IPv6 if both technologies are supported	02/2014
Verizon Wireless	Version 16.0: Added ICCID Extension node requirements Replaced * with explicit values of 1 through 4 for each Class of APN in ConnMo tree Updated Root SSL Certificate requirements	06/2014
Verizon Wireless	Version 17.0: Server and Client password information removed. Can be obtained from VZW OTADM IOT team. Updated: Client-Server Connection Failure During The SDM Session	10/2014
Verizon Wireless	Version 18.0: Added support for TLS transport layer security protocol Added requirements around Over The Air update capability	2/2015
Verizon Wireless	Version 19.0: Added support for SHA-256 certificate	6/2015
Verizon Wireless	Version 20.0: Remove requirements for data retry parameters Remove requirements for SIP timers	2/2016

Verizon Wireless	Version 21.0 Updated requirements with new URL support for SHA-2 certificates	6/2016
Verizon Wireless	Version 22.0 Specified commands for all Nodes	10/2016
Verizon Wireless	Version 23.0 Updated VZWIMS APN name to "IMS" Updated dual stack IP support for 4g2.vzwadm.com	06/2017
Verizon Wireless	Version 24.0 Retired few requirements Removed ability to disable APN1 and APN2 in ConnMo tree Misc. updates	October 2017
Verizon Wireless	Version 25.0 Updated VZ_REQ_LTEOTADM_7672 to add a note for Mod to be the device model number instead of the commercial name of the device. Added VZ_REQ_LTEOTADM_7332288 to define Configuration Update	February 2018
Verizon Wireless	Version 26.0 Retired the following requirements: 1. Disable Testing VZ_REQ_LTEOTADM_7715 Added or Updated following requirements: 1. Updated -- Root Certificate requirements VZ_REQ_LTEOTADM_36249 2. Added new requirement -- APN Management after SIM change VZ_REQ_LTEOTADM_8312636 3. Updated VZ_REQ_LTEOTADM_36249 to remove reference to Symantec and also added list of recommended Root Certificates	June 2018
Verizon Wireless	Version 27.0 Added Cipher Suite information to requirements VZ_REQ_LTEOTADM_36249	October 2018

Raj Damle	Version 28.0 Removed the Digicert Global Root G3 certificate from requirement VZ_REQ_LTEOTADM_36249	February 2019
-----------	---	---------------

1.1 INTRODUCTION VZ_REQ_LTEOTADM_2395

Verizon Wireless has launched LTE network service in the 3GPP Band 13 frequency band (700 MHz C Block). This document includes an Over-The-Air (OTA) device management solution for devices on this network. This publication is part of Verizon Wireless compliance with the FCCs rules for 700 MHz C Block (47 C.F.R. § 27.16), as explained in the FCCs Second Report and Order in WT Docket No. 06-150, "Service Rules for the 698-746, 747-762 and 777-792 MHz Bands" released on August 10, 2007.

In this document, the terms LTE (Long Term Evolution) and E-UTRA (Evolved Universal Terrestrial Radio Access) are considered equivalent.

1.1.1 APPLICABILITY VZ_REQ_LTEOTADM_2396

These requirements apply to all devices designed to operate on the Verizon Wireless LTE 3GPP Band 13 network. 3GPP Band 13 is per 3GPP TS 36.101: *Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception*.

This document covers APN management, a part of SDM technology. Specifically, this document doesnt include any Firmware Updating mechanism. Please see Section on "APN Management".

For any questions related to this document, please contact Verizon Wireless through the Verizon Wireless Open Development website.

1.1.2 3GPP Specifications VZ_REQ_LTEOTADM_7654

Refer to the 3GPP Specifications section of the Verizon Wireless LTE 3GPP Band 13 Network Access Requirements.

1.1.3 GLOSSARY/DEFINITIONS/ACRONYMS VZ_REQ_LTEOTADM_2398

This section defines acronyms and terms used throughout the document.

Acronym/ Term	Definition
ADD	Automatic Device Detection
APN	Access Point Name
ConnMO	Connectivity Management Object
DDF	Device Description Framework
DTD	Document Type Definition
HMAC	Hash-based Mutual Authentication Code
IMEI	International Mobile Equipment Identity, a 14 digit value plus 1 digit checksum value computed as per the 3GPP requirements.
IMEI SV	The International Mobile Equipment Identity and Software Version Number, a 14 digit value plus 2 digits software version number.
OMA	Open Mobile Alliance
OMA-DM	Open Mobile Alliance Device Management
OTA	Over-the-Air
OTADM	Over the Air Device Management
PST	Product Support Tool
SDM	Subscriber Device Management- in this document, SDM refers to APN Management and Device "profiling"
UI	User Interface
UE	User Equipment
WAP	Wireless Application Protocol
VZW	Verizon Wireless

1.1.4 REQUIREMENTS LANGUAGE VZ_REQ_LTEOTADM_2399

This document uses the following verbal forms in conjunction with requirements:

- "Shall" or "Shall not" indicates the requirement is mandatory
- "Should" indicates the requirement is recommended but not mandatory
- "May" indicates the requirement is optional

1.1.5 DEPLOYMENT PLANS VZ_REQ_LTEOTADM_2400

Verizon Wireless has deployed a network-based solution for over-the-air device management. It is recognized that newly added capabilities outlined in this document may require both server and device development. Verizon Wireless will ensure that the device and server requirements are properly aligned. Key dates for additional OTADM feature implementation is as follows:

- 4G OTADM Server Commercially Available July 2011
- Network Commercially Available For OTADM Roaming in 3G - 1Q2012
- Network Commercially Available For OTADM Roaming in 4G - 1Q2012
- Domain availability for 4g2.vzwadm.com January 2017

1.2 HARDWARE SPECIFICATIONS VZ_REQ_LTEOTADM_2401

1.2.1 MECHANICAL VZ_REQ_LTEOTADM_2402

N/A

1.2.2 ELECTRICAL VZ_REQ_LTEOTADM_2403

N/A

1.3 USER EXPERIENCE AND INTERACTIONS VZ_REQ_LTEOTADM_2404

Devices shall implement a mechanism so the end-user can alter or set the Class 3 APN name (only the name, and no other APN parameter) manually. In this case, the end-user can manually change that APN name on the device. The APN Management Requirements of this document shall apply in this manual PDN change case.

Please refer to Verizon Wireless Device Requirements for LTE 3GPP Band 13 network Access for more details on APN parameters alteration rules.

1.3.1 User Experience (Device) VZ_REQ_LTEOTADM_7655

~~LTEOTADM104 For Network-Initiated SDM/APN Management, there shall be no user interaction or notification to the end-user is no User Experience (User Interface requirements).~~

-

~~For end user manual edit of Class 3 APN parameters, refer to requirements traceability~~

1.3.1.1 INTERRUPTIONS DURING APN MANAGEMENT ACTIVITY VZ_REQ_LTEOTADM_2405

1.3.1.1.1 LTE Network (Bearer) Available VZ_REQ_LTEOTADM_7656

~~Devices not connected to any wireless network for OTADM shall not be able to perform OTADM activity.~~

~~If the LTE network is unavailable (e.g. APN or IMS access) and the device client has initiated an SDM activity, the device shall NOT notify the user and shall queue the attempt to retry based on the requirements of the LTE Data Retry. The device shall queue the SDM activity and attempt to retry based on LTE Data Retry requirements. Once the LTE network has been reconnected to, the device shall re-initiate the SDM activity.~~

1.3.1.1.2 Client-Server Connection Failure During The SDM Session VZ_REQ_LTEOTADM_7657

~~If the LTE network is available and a SDM activity has been initiated, but there is a failure in the OTADM Client-Server connection, the device shall not display an error message to indicate to the user a failure has occurred. The device shall not attempt to automatically reconnect and resume the session.~~

1.3.1.1.3 DM Fatal Error VZ_REQ_LTEOTADM_22978

If the DM session experiences a fatal error (i.e. checksum of final image invalid), the device shall notify the user.

1.3.1.1.4 Accessory Interaction (Applicable on to Handset form Factor Devices) VZ_REQ_LTEOTADM_7658

The SDM operations shall not be affected by the presence, addition or removal of any device accessories

1.3.1.2Subscriber Device Management VZ_REQ_LTEOTADM_7659

SDM sessions shall be initiated by means of network triggers. User-Initiated triggers for SDM related call flows are not defined.

1.3.1.3Network Initiated SDM Sessions VZ_REQ_LTEOTADM_7660

Network-initiated SMS messages to initiate VZW DM operations shall arrive on the device and the device shall silently initiate a connection with the VZW DM server without any user notification.

1.3.2 USER INTERFACE (DEVICE) VZ_REQ_LTEOTADM_2406

1.3.2.1Network Initiated SDM Session VZ_REQ_LTEOTADM_7661

User input is not required to proceed with Network-Initiated SDM operations while profiling and performing APNs parameters management.

1.3.2.2 User Initiated SDM Session - Manual PDN Name Change VZ_REQ_LTEOTADM_7662

Devices shall implement a mechanism so the end-user can alter or set the Class 3 APN name (only the name, and no other APN parameter) manually. In this case, the end-user can manually change that APN name on the device. The APN Management Requirements of this document shall apply in this manual PDN change case.

Please refer to Verizon Wireless Device Requirements for LTE 3GPP Band 13 network Access for more details on APN parameters alteration rules.

1.3.2.2.1 Instructions VZ_REQ_LTEOTADM_7663

During Feature lockdown the device OEM must supply instruction for accessing the UI to change the APN Class 3 as per this requirement.

1.4 OTA-DM SPECIFICATIONS VZ_REQ_LTEOTADM_2407

1.4.1 COMMON REQUIREMENTS FOR OTADM - STANDARDS COMPLIANCE VZ_REQ_LTEOTADM_2408

This informational section will have references to Industry Standards and Requirements as well as VZW-defined Requirements available to Open Access/ODI manufacturers. The device shall comply with the following Industry Requirements, as well as any VZW Requirements stated herein. If a conflict exists between this document and an Industry Standard, this document takes precedence. However, please contact VZW if there are additional questions.

The requirements stated in this section *will have information needed for implementation*. However, in each of the requirements stated throughout this document, the specific references will not be repeated. All references needed are in this section of this document.

In order for devices to have compatibility with Verizon Wireless LTE 3GPP Band 13 network for Device Management and support SDM, the following OMA DM requirements must be met.

Refer to "LTE 3GPP Band 13 Network Access" and "LTE SMS" requirements for details.

1.4.1.1 COMPLIANCE WITH VZW REQUIREMENTS VZ_REQ_LTEOTADM_22979

1. LTE 3GPP Band 13 Network Access
2. LTE SMS Requirements

1.4.1.1.1 OTHER INDUSTRY STANDARDS VZ_REQ_LTEOTADM_22980

1. WAP Push OTA Specification (for notification using SMS*)
2. HTTP V1.1
3. WAP-230-WSP Specification (Package 0 SMS* header detail)
4. WAP-259-WDP Specification (Package 0 SMS* header detail)
5. The device shall support the 3GPP2 SMS format as defined in 3GPP2 C.S0015-A v1.0 "Short Message Service (SMS) for Wideband Spread Spectrum Systems". The support for the 3GPP format, as defined in TS 23.040 "Technical realization of the Short Message Service (SMS)" shall be supported.
6. APN domain names shall employ domain formats as specified in RFC 3986

1.4.1.1.2 OMA Standards Compliance VZ_REQ_LTEOTADM_7664

LTEOTADM116 The device shall support the OMA-DM standard and the sections as outlined in the following documents:

Document	Reference Section
OMA Device Management Bootstrap, Version 1.2.	5.1.2.1 Customized Bootstrap 5.1.2.2 Server-Initiated Bootstrap
OMA DM Device Description Framework DTD, Version 1.2.	N/A
OMA Device Management Notification Initiated Session, Version 1.2.	5 Server Alert Management Session 6 Structure of General Notification Initiated Session Alert 7.1 Package #0 delivered using WAP Push
OMA Device Management Protocol, Version 1.2.	6.2 Multiple Messages In Package Requirements 8.1.2 Session Abort Requirement 8.2 Package 0: Management Initiation Alert from server to client 8.3 Package 1: Initialization from client to server 8.4 Package 2: Initialization from server to client 8.5 Package 3: Client response sent to

	server
	8.6 Package 4: Further server management operations
	8.7 Generic Alert
	9 Authentication (9.1, 9.2)
OMA Device Management Requirements Document, Version 1.2.	6.1.1 Security 6.4 Usability 6.3.1 System Elements Device
OMA Device Management Representation Protocol, Version 1.2.	5.1 MIME Usage 6 Mark-Up Language Description
OMA Device Management Security, Version 1.2.	5.1 Credentials 5.3 Authentication 5.4 Integrity 5.5 Confidentiality 5.6 Notification Initiated Session
OMA Device Management Standardized Objects, Version 1.2.	5 Standardized Objects
OMA Device Management Tree and Description, Version 1.2.	5 The Management Tree 6 Nodes 7 Properties of nodes 8 Device Management Tree Exchange 9 Device Description Framework*
OMA Device Management Tree and Description Serialization, Version 1.2.	5 TND Serialization Definition 6 TND Syntax
WAP-230-WSP Specification	8.2.4 Push and Confirmed Push Facilities
WAP-259-WDP Specification	6.5 Mapping WDP to CDMA SMS

1.4.1.2 OTADM CLIENT VZ_REQ_LTEOTADM_22981

The device shall support an OTADM client that supports OMA-DM protocols defined in this document. The client shall correctly interpret OMA-DM commands, execute commands sent by the server administrator and send back relevant responses to the issuing management server as defined in the OMA DM standards referenced above.

1.4.1.2.1 OTADM CLIENT PROVISIONING VZ_REQ_LTEOTADM_22982

1.4.1.2.1.1 Factory Bootstrapping VZ_REQ_LTEOTADM_7699

Devices shall implement Customized (Factory) Bootstrapping in accordance with "OMA Device Management Bootstrap, Vs 1.2" requirements

Additionally, all devices shall be Factorybootstrapped with DM parameters prior to coming on the LTE network. The FactoryBootstrap parameters shall be pre-populated with the settings. See requirements traceability.

" Devices using VZW OTADM solution shall not support OTA Bootstrap (Network Initiated Bootstrap).

" Devices using VZW OTADM solution shall not support OMA-CP (OMA Client Provisioning).

1.4.1.2.1.2 PDN Provisioning for OTADM Device Management Traffic

VZ_REQ_LTEOTADM_7701

Devices shall use the Admin PDN dedicated to DM related traffic. The VZW IMS PDN shall be used for SMS push.

For APNs factory provisioning requirements, refer to the latest version of VZW Device Requirements - LTE 3GPP Band13 Network Access.

1.4.1.2.2 OTA-DM (Emergency Mode) VZ_REQ_LTEOTADM_5965111

The device and/or OMA-DM client shall ensure that the device is in idle mode prior to starting a PPP session for the purposes of DM.

Devices shall not attempt to initiate a DM data session until the emergency procedure is complete and they return to idle.

Network Initiated: Valid DM Notification messages (via SMS) shall be ignored when the device is in the Emergency mode.

Client-initiated: Refer to VZW Feature Definitions/Requirements document for emergency calling procedures.

User-initiated: For feature phones, refer to VZW Feature Definitions/Requirements document for emergency calling procedures. See UI requirements for additional details. For converged devices, refer to Converged Device Requirements document for emergency calling procedures.

1.4.1.3 OTADM TRANSPORT SECURITY REQUIREMENTS

VZ_REQ_LTEOTADM_22983

Due to recent security vulnerability with SSL transport layer protocols, the device must only support TLS transport layer protocol (version 1.2 & higher). It is recommended that device vendors provide the ability to install additional root certificates over the air if a need arise.

- Device vendors must support SHA-256 SSL server certificates.
- Device vendor must use below URL for their new devices and SUs which supports SHA-256 SSL server certificates.

./DMAcc/AppAddr/Addr	https://4g2.vzwadm.com
./DMAcc/AppAddr/AddrType	URI
./DMAcc/AppAddr/Port	443

1.4.1.3.1 Confidentiality (Data Encryption) VZ_REQ_LTEOTADM_7703

All Device Management interaction between the device and the OTADM Server shall be performed using HTTPS transport protocol to ensure proper protection of OMA DM messages.

1.4.1.3.1.1 Root Certificate requirements VZ_REQ_LTEOTADM_36249

The device vendor shall pre-install the following root certificates required to support the SSL server certificate and its certificate chain installed on the OTADM server.

- DigiCert Global Root CA (Serial #: 08:3B:E0:56:90:42:46:B1:A1:75:6A:C9:59:91:C7:4A)
- DigiCert Global Root G2 (Serial #: 03:3A:F1:E6:A7:11:A9:A0:BB:28:64:B1:1D:09:FA:E5)
- DigiCert Trusted Root G4 (Serial #: 05:9B:1B:57:9E:8E:21:32:E2:39:07:BD:A7:77:75:5C)

- VeriSign Universal Root CA (Serial #: 40:1a:c4:64:21:b3:13:21:03:0e:bb:e4:12:1a:c5:1d)

The device vendor shall also support required signature algorithm, key size and cypher suites of the SSL server certificate.

The device vendor shall also verify that a server certificate currently installed on the OTADM server is chained to the root certificates pre-installed on the device. The device vendor may use the openssl tool or the following links to check the SSL server certificate and its certificate chain on the OTADM server:

<https://www.digicert.com/help/>
<https://cryptoreport.websecurity.symantec.com/checker/>

The Root Certificates can be downloaded from the following links:

- DigiCert root certs: <https://www.digicert.com/digicert-root-certificates.htm>
- VeriSign/Symantec root certs: <https://www.websecurity.symantec.com/theme/roots>

It is recommended that the device pre-installs prevalent root certificates to support other certificate authorities such as DigiCert, Comodo, GoDaddy, and Entrust.

Along with the root certificates the device shall support all of the following Cipher Suites:

- TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256 (0xC027)
- TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384 (0xC028)
- TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (0xC02F)
- TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (0xC030)

1.4.1.3.2 AUTHENTICATION VZ_REQ_LTEOTADM_22984

1.4.1.3.2.1 Package 0 Authentication (Notification Initiation Session Message) VZ_REQ_LTEOTADM_7705

The device shall support Package 0 authentication for bootstrap messages, including 'stale nonce' retry. For details, please refer to "OMA Device Management Security", Version 1.2

Devices shall confirm the source of the DM Notification message by validation of the digest sent as part of the message payload.

1.4.1.3.2.2 Mutual Authentication VZ_REQ_LTEOTADM_7707

Devices shall support mutual authentication at the DM layer. Digest authentication shall be used for all Device Management-related authentication sessions. Digest authentication shall be implemented for all messages (i.e. Notification Messages) between the OTADM Server and Device. Authentication and its challenge shall follow the specifications as defined in "OMA Device Management Security, Version 1.2, "OMA Device Management Protocol V1.2, and "OMA Device Management Initiation Session V1.2".

1.4.1.3.2.3 Failed Authentication Attempt Handling VZ_REQ_LTEOTADM_7665

For details, please refer to "OMA Device Management Security Protocol V1.2, and "OMA Device Management Notification Initiation Session V1.2" documents.

1.4.1.3.2.4 Authentication Key VZ_REQ_LTEOTADM_7666

Instructions on how to generate Server and Client password will be provided by VZW when vendor submits a request to gain access to VZW OTADM IOT self-test environment (IOT Handshake tool).

Reference: OMA Device Management Security V1.2: Section 5.3.3 Authentication/Password and Nonce Usage

1.4.1.3.3 Integrity VZ_REQ_LTEOTADM_7667

The device shall utilize HMAC for integrity protection of Device Management messages, as specified in "OMA Device Management Security V1.2", and "OMA Device Management Protocol V1.2" : Section 9 Authentication, OMA Device Management Security V1.2: Section 5.4 Integrity.

1.4.1.3.4 OTA Device Management Tree Support VZ_REQ_LTEOTADM_7668

The OMA DM Tree shall conform to the OMA-DM standard. URI and node names in a Device Management tree shall be treated as case sensitive as per OMA DM Tree and Description specs (OMA-TS-DM_TND-V1_2_1-20080617-A).

1.4.1.3.4.1 Commands VZ_REQ_LTEOTADM_7669

LTEOTADM129Nodes in the DM Tree shall support the following standard commands as defined below:

- Exec
- Get
- Replace

For details on the commands, please refer to OMA Device Management Protocol V1.

1.4.1.3.4.2 Correlator ID VZ_REQ_LTEOTADM_38690

The device may support Correlator ID in asynchronous response to an asynchronous Exec command from the DM server. In the asynchronous response, the device shall include the same Correlator ID that it has received in an Exec command. The device shall omit Correlator ID in all other instances. The Correlator ID is an optional field and device must not fail if the field is not present from the server.

For details on the commands, please refer to OMA Device Management Protocol V1.x.

1.4.1.3.5 ACCESS CONTROL LIST (ACL) VZ_REQ_LTEOTADM_22985

For details on ACL support, please refer to OMA Device Management Tree and Description V1.2

1.4.1.3.6 Verizon Wireless Defined Base DM Tree VZ_REQ_LTEOTADM_7670

LTEOTADM131The device shall support the following basenode and sub-tree nodes for DM operations.

* DDF provided by the DeviceOEMs contains all information needed for the OMA-DM nodes.

OMA-DM Node	Description
.	Base Node
./DMAcc	Root Node for all DM Account items
./DevInfo	Root Node for all Device Information items
./DevDetail	Root Node for all Device Detail items
./ManagedObjects	Root Node for all Managed Object items

1.4.1.3.7 DMAcc Subtree VZ_REQ_LTEOTADM_7671

The device shall support the following DMAcc nodes for DM operations.

DMAcc Subtree			
DMAcc Subtree	Value	Value Type	Commands
./DMAcc/AppID	W7	Char	Get
./DMAcc/ServerID	com.vzwdmserver	Char	Get
./DMAcc/Name	VZW DM Server	Char	Get
./DMAcc/AppAddr	Node	Char	Get
./DMAcc/AppAddr/Addr	https://4g2.vzwdm.com***	Char	Get, Replace
./DMAcc/AppAddr/AddrType	URI	Char	Get, Replace
./DMAcc/AppAddr/Port	443	Char	Get, Replace
./DMAcc/AAuthPref	syncml:auth-md5	Char	Get
./DMAcc/AppAuth	Node		Get
./DMAcc/AppAuth/Client	Node		Get
./DMAcc/AppAuth/Client/AAuthLevel	CLCRED	Char	Get
./DMAcc/AppAuth/Client/AAuthType	Digest	Char	Get
./DMAcc/AppAuth/Client/AAuthName	IMEI (see note)	Char	Get
./DMAcc/AppAuth/Client/AAuthSecret	<VZW Defined>*	Char	No Get

./DMAcc/AppAuth/Client/AAuthData	See note below**	Char	No Get
./DMAcc/AppAuth/Server	Node		Get
./DMAcc/AppAuth/Server/AAuthLevel	SRVCRED	Char	Get
./DMAcc/AppAuth/Server/AAuthType	Digest	Char	Get
./DMAcc/AppAuth/Server/AAuthName	com.vzwdmserver	Char	Get
./DMAcc/AppAuth/Server/AAuthSecret	See note below**	Char	No Get
./DMAcc/AppAuth/Server/AAuthData	See note below**	Char	No Get

* See requirements traceability to set value as defined

** The initial values for these nodes will be provided by VZW OTADM IOT team when vendor submits a request to gain access to VZW OTADM IOT self-test environment (IOT Handshake tool).

***All new devices and all SUs must support this new URL with SHA-2 cert support. Reference: OMA Device Management Standardized Objects V1.2

Note: AAuthName shall be in the format of characters without any prefix or postfix, for example, "123456789012345", and not "IMEI:123456789012345".

1.4.1.3.8 DevInfo Subtree VZ_REQ_LTEOTADM_7672

The DevInfo subtree shall be as defined in the OMA Device Management Standardized Objects V1.2. The Device shall implement the following node values:

DevInfo Nodes	Value	Value Type	Command
./DevInfo/DevId	IMEI (see Note)	Char	Get
./DevInfo/DmV	1.2	Char	Get
./DevInfo/Lang	English	Char	Get
./DevInfo/Man	<Manufacturer Name>	Char	Get
./DevInfo/Mod	<Model Number> (see Note)	Char	Get
./DevInfo/Ext	Node		Get

Note: DevId format shall be "IMEI:x", with x being the value of the IMEI (without quotes).

Mod shall be the Model Number of the device instead of the commercial name of the device

1.4.1.3.9 DevDetail Subtree VZ_REQ_LTEOTADM_7673

LTEOTADM134The DevDetail subtree shall be as defined in theOMA Device Management Standardized Objects V1.2.The Device shall implement the following node values of the DevDetail subtree:

DevDetail Nodes	Value	Value type	Command
./DevDetail/URI	Node	Char	Get
./DevDetail/URI/MaxDepth	12	Char	Get
./DevDetail/URI/MaxSegLen	32	Char	Get
./DevDetail/URI/MaxTotLen	127	Char	Get
./DevDetail/DevTyp	<value>	Char	Get
./DevDetail/FwV	<value> (See Note)	Char	Get
./DevDetail/HwV	<value>	Char	Get
./DevDetail/LrgObj	True, False	Char	Get
./DevDetail/OEM	<value>	Char	Get
./DevDetail/SwV	<value>	Char	Get

Note: APN Management and ADD flowrequires that ./DevDetail/FwV be an implemented and populated leaf node.

1.4.1.3.10 NAI VZ_REQ_LTEOTADM_5965085

Devices the support 3G CDMA technologies shall use the current data NAI <MDN>@vzw3g.com

1.4.1.4DM CONNECTIVITY REQUIREMENTS VZ_REQ_LTEOTADM_22986

1.4.1.4.1 NETWORK INITIATED DM SESSIONS VZ_REQ_LTEOTADM_22988

1.4.1.4.1.1 DM Notification via SMS message (Trigger) VZ_REQ_LTEOTADM_7708

OTADM compliant devices shall receive and process Device Management notifications delivered to the device via an SMS message.

NOTE: SMS messages are configured and sent by the OTADM Server over the IMS PDN. Network-Initiated functionality is triggered by these SMS.

1.4.1.4.1.2 ~~LTE Service Required~~ VZ_REQ_LTEOTADM_7674

~~LTE coverage is required for the OMA-DM client to attempt to connect a DM session; device shall ensure that proper service is available before connecting the data session. For network-initiated DM sessions, if the OMA-DM client determines that the device is not in a LTE coverage area, the client shall follow the data retry mechanism as defined in the LTE Data Retry Requirements.~~

1.4.1.4.1.3 Network Initiated (NI) Retry VZ_REQ_LTEOTADM_7675

If the device is in adequate LTE coverage area, but the network-initiated DM session fails to connect to the server for any reason, the device shall fail the session and not retry.

1.4.1.4.2 USER INITIATED DM SESSIONS VZ_REQ_LTEOTADM_22989

1.4.1.4.2.1 ~~Manual PDN Change~~ VZ_REQ_LTEOTADM_7676

~~When a user makes a manual Class 3 APN name change through the device UI, the device shall set the APN values in accordance with the Service Availability section of this document.~~

~~Manual APN Name changes shall not trigger a DM Session~~

1.4.1.4.2.2 ~~LTE Service Required~~ VZ_REQ_LTEOTADM_7677

~~LTE coverage is required for the OMA-DM client to attempt to connect a DM session; device shall ensure that proper service is available before connecting the data session.~~

~~For DM sessions, if the OMA-DM client determines that the device is not in a LTE coverage area, the client shall use data retry mechanism and shall follow the data retry mechanism as defined in the LTE Data Retry Requirements.~~

1.4.1.4.2.3 XML ELEMENTS VZ_REQ_LTEOTADM_22990

1.4.1.4.2.4 VZ_REQ_LTEOTADM_7678

~~SyncML uses the SYNCML URN type to identify SyncML specific name spaces and unique names. The LocURI element type shall contain the correct URN when identifying the device.~~

~~For example, the LocURI for a device identified by its IMEI with IMEI value 123456789101112 would be <LocURI>IMEI:123456789101112</LocURI>, and *not* <LocURI>123456789101112</LocURI>.~~

1.4.1.4.2.5 Elements and Formatting VZ_REQ_LTEOTADM_7679

Data Elements shall only contain the formatted characters of that element.

For example, if the Format of a Data Element is int (integer), and the Data element represents a timer in seconds, then the data element shall only include integer characters, e.g. 0-9., and not include the unit (sec) within its field. Thus, for a timer value of 25 seconds, the required data element would be <data> 25 </data> and not <data> 25 sec </data>.

1.4.1.4.3 SUPPORT FOR IPV6 CONNECTIVITY VZ_REQ_LTEOTADM_31775

1.4.1.4.3.1 IPv6 Connection VZ_REQ_LTEOTADM_31776

- The DM Client on the device shall support IPv6 connectivity with the OMADM server over Class 2 APN's PDN Connection.
 - This functionality is in addition to the IPv4 support that exists today on each client.
- If an IPv6 address is returned by the DNS server for an AAAA (quad-A) query, then the device will prefer IPv6 mode connectivity versus IPv4 mode connectivity with the DM Server over the Class 2 APN's PDN Connection.
 - If an IPv6 address is not returned by the DNS server, then the device shall use IPv4 address received from the "A" DNS query result to connect to the DM server (over the Class 2 APN's PDN Connection).
- As such, IPv6 connection shall be supported for all aspects of OMADM communication (over an IP network) as described in this requirements document.

1.4.1.4.3.2 Connection Setup Failure VZ_REQ_LTEOTADM_31777

- If the device is not in adequate LTE coverage where a Class 2 PDN connection cannot be established, then the requirements outlined in this document (See requirements traceability) shall be followed.
- If the device is in adequate LTE coverage with Class 2 PDN connection established and if the DM Client is unable to connect to the DM server over an IPv6 connection through the Class 2 APN's PDN connection for any reason; then the device shall not disconnect the PDN connection. Instead the device shall fall back to the available IPv4 connection and attempt to connect to the DM server at most once.
 - If the communication still cannot be established, then the device shall follow Retry requirements outlined in this document (See requirements traceability)

1.4.1.4.3.3 Connection Failure During a DM Session VZ_REQ_LTEOTADM_31778

If device is in active communication with the DM server and the connection fails, the device shall not attempt to connect back to the server over any available connection.

1.4.1.5 OMA-DM TREE AND STANDARD COMMANDS VZ_REQ_LTEOTADM_22992

1.4.1.5.1 APN MANAGEMENT VZ_REQ_LTEOTADM_22993

By APN management, VZW means a mechanism for changing the current APNs defined in this document. There are three cases where changing the APN occurs in this document. One case is when the device has its APN changed manually, e.g. Class 3 APN is changed by the end-user. The second case is where the APN change is directed by the OTADM Server during Network provisioning or insertion of a new SIM card. The third case is when the OTADM Server directs the device to modify an APN for additional end-user services.

APN management can occur in two distinct ways: through an SDM session initiated specifically to change a targeted APN value, or through a Mobile Automatic Device Detection (ADD) session.

APN management is enabled through the ConnMo tree (read and writing of the APN parameter values) and its manipulation.

1.4.1.5.1.1 MOBILE AUTOMATIC DEVICE DETECTION (ADD): BACKGROUND AND DESCRIPTION VZ_REQ_LTEOTADM_22994

Mobile Automatic Device Detection is an APN Management server process which happens when a new UICC card is associated with a device from out-of-box condition, or existing UICC card (activated on another Device) and then inserted into current mobile device. Both situations, the out of the box or the current device, having the SIM newly inserted and powered on, triggers a UICC card activation, results the SIMOTA server to send ADD (Automatic Device Detection) message to the SDM server; the SDM server, upon receiving the ADD message, will associate the device IMEI to the current activated MDN, and send a Package 0 (SMS) to initiate the following tasks:

1. Read LTE APN parameters, including APN Id, name, and IP, for all 4 APN classes, from the device, and replace these parameters with network required values, Read functionality is performed via OMA specification as a "Get" command. Write functionality is performed via OMA specification as "Replace" command. After the "Replace" command is sent to the device, the Server will send an Execute command to the device, as per OMA specifications, which triggers the device to enable the APN changes.
2. Upon successful read and replacement of APN values, there is a check performed by the OTADM server to determine if there is a firmware-update package available for the device.
 - a. If the device supports a Proprietary Firmware, the ADD process will still determine if the device requires a firmware update by checking the "FwV" field in the Device Detail tree. In the Proprietary Firmware support case, the VZW OTADM Server will not initiate a firmware update.
 - b. All devices, whether utilizing VZW-FOTA or Proprietary FOTA, shall populate the FwV leaf node.

1.4.1.5.1.2 ADD Flow Requirements VZ_REQ_LTEOTADM_7683

VZW does not specify the number, type, or sequence of APNs that may be read or written during an ADD session, as per OMA Specifications. The device shall be prepared to respond to any request made by the server for reading and writing the APN parameters during that ADD session.

1.4.1.5.1.3 APN SERVICE AVAILABILITY VZ_REQ_LTEOTADM_22995

~~Upon the successful completion of any APN parameter update during an ADD flow (i.e., after the OTADM Server has replaced the APN parameters and performed an Execute command), or during a manual Class 3 APN name change, device shall not require a reboot in order to enable the updated APN parameters.~~

~~If the device had performed a data disconnect during the update of the APNs, the device shall perform a reconnect using the updated APN parameters, without the need for a device reboot.~~

1.4.1.5.1.4 INFORMATIONAL BACKGROUND VZ_REQ_LTEOTADM_22996

APN Service Availability refers to the ability of the device to connect to a newly modified APN without noticeable delay.

To illustrate, suppose the current Class 3 APN name is www.changeme.com and the user manually changes the Class 3 Internet APN to www.vzw.com. The user expects to be able to initiate a session with the network through invoking the browser and have the device attach to the www.vzw.com without noticeable delay (of service/connectivity to the Internet) or requiring the device to reboot. The browser launch and connection to the APN, e.g. www.vzw.com, is expected to be less than 10 seconds in good RF conditions. However, quantification of this requirement is nearly impossible. Thus, in the time it takes for a user to attempt to connect to the changed APN, the device should have the new APN enabled. In other words, when the device is next requested to utilize the new APN, the APN must be enabled.

This concept defines "APN service availability"

1.4.1.5.1.5 Service Availability for APN Parameter Changes VZ_REQ_LTEOTADM_7688


Upon the successful completion of any APN parameter update during an ADD flow (i.e., after the OTADM Server has replaced the APN parameters and performed an Execute command), or during a manual Class 3 APN name change, device shall not require a reboot in order to enable the updated APN parameters.

If the device had performed a data disconnect during the update of the APNs, the device shall perform a reconnect using the updated APN parameters, without the need for a device reboot.

1.4.1.5.1.6 ADD FLOW DIAGRAM VZ_REQ_LTEOTADM_22998

The following diagram shows the ADD flow that is utilized by VZW. This is for information only.

LTE ODI Activation Call flow

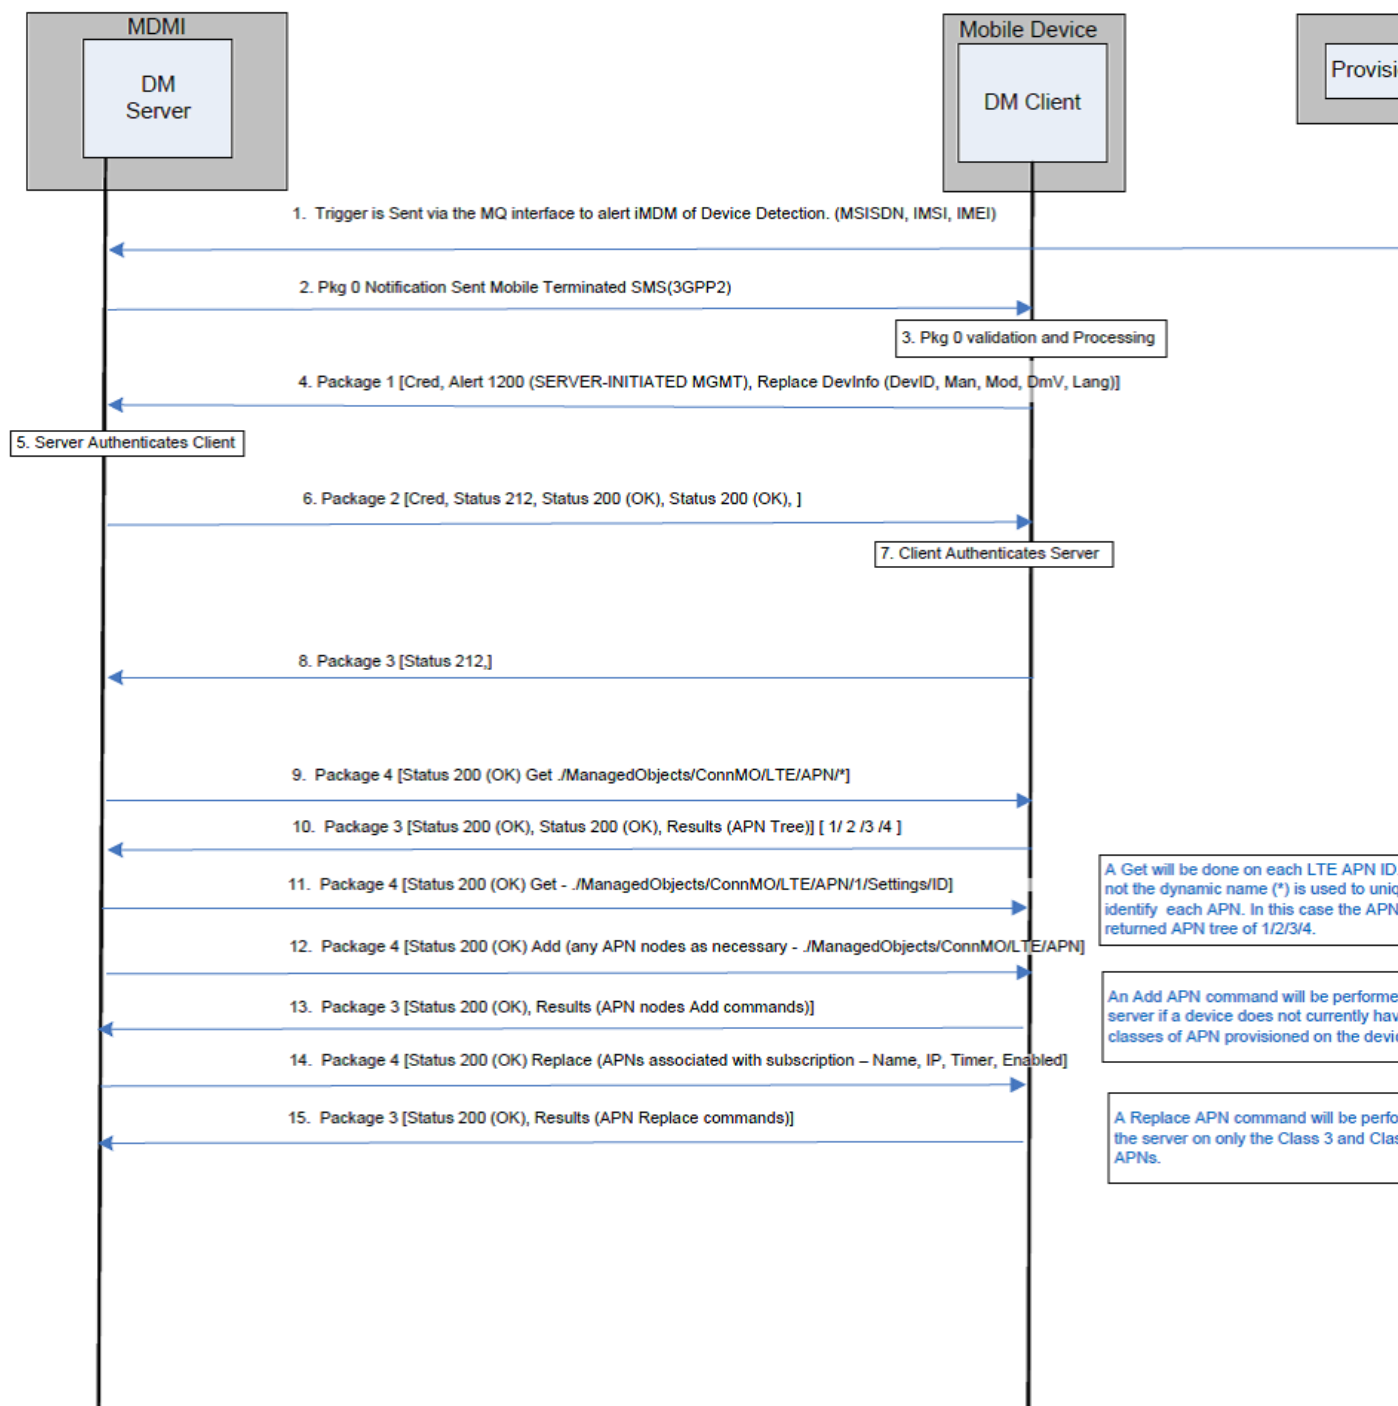

1.4.1.5.1.7 APN Management after SIM change VZ_REQ_LTEOTADM_8312636

When the Device is initiating a DM session with the server due to a SIM change detection, the device shall perform the following activities:

- " Device (DM client) detects SIM change and starts a timer for 5 minutes
- " If WAP PUSH from server is received before 5 minutes, the timer is cancelled and device sets up the session with the server
- " If WAP PUSH is not received within 5 minutes (use case of ADD miss, two SIMs and 1 device scenario, etc&) and the timer expires, then the device shall initiate the session with the server after the expiry

1.4.1.5.2 Connectivity Management VZ_REQ_LTEOTADM_7684


The device shall support the following Connectivity Subtree and operations:

Connectivity Node	Description	Value	Value Type	Commands
./ManagedObjects/ConnMO/LTE	Internal Node	node		Get
./ManagedObjects/ConnMO/LTE/APN/1	Internal Node	node		Get
./ManagedObjects/ConnMO/LTE/APN/1/Setting	Internal Node	node		Get
./ManagedObjects/ConnMO/LTE/APN/1/Setting/Id	APN Id	1	int	Get
./ManagedObjects/ConnMO/LTE/APN/1/Setting/Name	APN Name	IMS	character	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/1/Setting/IP	IP Version. Defined by Standards but not used by Verizon Wireless	IPv4 or IPv6 or IPv4 and IPv6	character	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/1/Setting/Enabled	Return APN /1/s status of Enabled (True), or Disabled	True	Boolean	Get

	(False)			
./ManagedObjects/ConnMO/LTE/APN/1/Setting/Operations	Internal Node	Null		Get
./ManagedObjects/ConnMO/LTE/APN/2/Setting/Id	APN Id	2	int	Get,
./ManagedObjects/ConnMO/LTE/APN/2/Setting/Name	APN Name	VZWADMIN	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/2/Setting/IP	IP Version. Defined by Standards but not used by Verizon Wireless	Ipv4 or Ipv6 or Ipv4 and Ipv6	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/2/Setting/Enabled	Return APN /2/s status of Enabled (True), or Disabled (False)	True	Boolean	Get
./ManagedObjects/ConnMO/LTE/APN/2/Setting/Operations	Internal Node	Null		Get
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Id	APN Id	3	int	Get,
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Name	APN Name	VZWINTERNET	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/3/Setting/IP	IP Version. Defined by Standards but not used by Verizon Wireless	Ipv4 or Ipv6 or Ipv4 and Ipv6	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Enabled	Return APN /3/s status of Enabled (True), or Disabled (False)	True, False	Boolean	Get
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Operations	Internal Node	Null		Get
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Operations/Enable	Enable APN	Null		Exec
./ManagedObjects/ConnMO/LTE/APN/3/Setting/Operations/Disable	Disable APN	Null		Exec

./ManagedObjects/ConnMO/LTE/APN/4/Setting/Id	APN Id	4	int	Get,
./ManagedObjects/ConnMO/LTE/APN/4/Setting/Name	APN Name	VZWAPP	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/4/Setting/IP	IP Version. Defined by Standards but not used by Verizon Wireless	Ipv4 or Ipv6 or Ipv4 and Ipv6	char	Get, Replace
./ManagedObjects/ConnMO/LTE/APN/4/Setting/Enabled	Return APN /4/s status of Enabled (True), or Disabled (False)	True, False	Boolean	Get
./ManagedObjects/ConnMO/LTE/APN/4/Setting/Operations	Internal Node	Null		Get
./ManagedObjects/ConnMO/LTE/APN/4/Setting/Operations/Enable	Enable APN	Null		Exec
./ManagedObjects/ConnMO/LTE/APN/4/Setting/Operations/Disable	Disable APN	Null		Exec
./ManagedObjects/ConnMO/IMS	Interior Node	Node		Get
./ManagedObjects/ConnMO/IMS/Setting	Interior Node	Node		Get
./ManagedObjects/ConnMO/IMS/Setting/Domain	Home Domain Name for the device to populate the request URI for REGISTRATION	vzims.com	char	Get
./ManagedObjects/ConnMO/IMS/Setting/smsformat	Device Outgoing SMS based on either 3GPP or 3GPP2 standards	3GPP or 3GPP2	char	Get, Replace
./ManagedObjects/ConnMO/IMS/Setting/sms_over_IP_network_indication	Turns IMS ON/OFF on	True	boolean	Get, Replace

	the device			
--	------------	--	--	--



1.4.1.5.2.1 ConnMO Replace Command - Values not case sensitive

VZ_REQ_LTEOTADM_7685

All writeable node values shall not be case sensitive, ie, device shall be able to write/replace the node values either in lower cases or upper cases.

1.4.1.5.3 Functionality For Device Connectivity Management

VZ_REQ_LTEOTADM_7686

Note: All Timer values in the above table have units associated, e.g. seconds or minutes; and the values shall be integer type; It is imperative that the server and the device interpret the value in the same units. If the units are specified in the above table as, e.g. seconds, then the device shall interpret any value received by the network as the same units (e.g. seconds). Similarly, if the device is going to populate a value in the tree, it shall assume the value the network will receive is the units in the above table.

Device shall allow the remote capture of connectivity settings and attributes based on OMA DM commands sent from the VZW DM server system.

The following node commands shall result in the listed functionality:

1.4.1.5.3.1 APN Name Format VZ_REQ_LTEOTADM_7702

Devices shall support the APN domain names which shall employ the domain formats as specified in RFC 3986

1.4.1.5.3.2 APN ID VZ_REQ_LTEOTADM_7687

APN Id get command on this node returns the Network Identifier of the associated Access Point Name (APN), for IMS APN, Id = 1; for Admin APN, Id = 2; for Internet APN, Id = 3; for VZW Applications APN, Id =4; replace command changes the value;

1.4.1.5.3.3 APN Name VZ_REQ_LTEOTADM_7689

APN Name get command on this node returns the associated APN name, for IMS, the APN name = IMS; for Admin, the APN name = VZWADMIN; for Internet, the APN name = VZWINTERNET; for VZW Application, the APN name = VZWAPP; replace command, where stated in the CONNMO tree, changes the value;

1.4.1.5.3.4 IP VZ_REQ_LTEOTADM_7690

IP get command on this node returns the associated APNs IP Type, which is one of: IPv4, IPv6, or IPv4 and IPv6; replace command changes the value.

1.4.1.5.3.5 Enabled VZ_REQ_LTEOTADM_7691

Enabled get command on this node returns the APN enabled (True) or disabled (False) status for all APNs;

1.4.1.5.3.6 IMS Domain VZ_REQ_LTEOTADM_7692

IMS Domain get command on this node returns the home domain name for the device to populate the request URI for registration; replace command changes the value;

1.4.1.5.3.7 ~~SIP T1 Timer~~ VZ_REQ_LTEOTADM_7693

~~SIP T1 Timer get command on this node returns the current value of the Session Initiation Protocol T1 Timer value in seconds; replace command changes the value in seconds.~~

~~The Range of Timer values shall be from .01 to 10 seconds.~~

1.4.1.5.3.8 ~~SIP TF Timer~~ VZ_REQ_LTEOTADM_7694

~~SIP TF Timer get command on this node returns the current value of the Session Initiation Protocol TF Timer value in seconds; replace command changes the value.~~

~~The range of timer values shall be from .01 to 40 seconds.~~

1.4.1.5.3.9 ~~SIP T2 Timer~~ VZ_REQ_LTEOTADM_7695

~~SIP T2 Timer get command on this node returns the current value of the Session Initiation Protocol T2 Timer value in seconds; replace command changes the value.~~

~~The range of timer values shall be from .01 to 20 seconds~~

1.4.1.5.3.10 SMS Format VZ_REQ_LTEOTADM_7696

~~SMS Format get command on this node returns the devices outgoing SMS standards (3GPP or 3GPP2); replace command changes the value;~~

1.4.1.5.3.11 Enable VZ_REQ_LTEOTADM_7697

Enable exec command on this node turns an APN on, applicable only to APN Id = 3 and 4. Enable is applicable to neither APN ID = 1 nor APN ID = 2 is due to the required device behavior specified in LTE_3GPP_Band13_Network Access requirements.

1.4.1.5.3.12 **Disable** VZ_REQ_LTEOTADM_7698

Disable exec command on this node shall turn the specified APN off, applicable to all APNs except APN1 and APN2.

1.4.1.5.3.13 **Disable Testing** VZ_REQ_LTEOTADM_7715

~~The OEMs shall supply, to the OTADM IOT Vendor, the capabilities/tools/resources required to restore Enable a Class 1 or Class 2 APN once Disabled. This 'capability' is for OTADM IOT testing purposes only. Prior to Commercial Software Release, i.e., during OTADM IOT, the OEM may implement an end-user tool for Enabling and Disabling APN Class 1 and Class 2~~

1.4.1.5.3.14 **IP Indication for SMS** VZ_REQ_LTEOTADM_23000

The SMS IP indication is intended to control if the Mobile Originated (MO) SMS is performed over IMS.

The value of "True" means the device shall perform Mobile Originated (MO) SMS on the VZW IMS Network. A value of "False" means the device shall not perform Mobile Originated (MO) SMS on the IMS Network.

The default value shall be "True"

Note: See "LTE SMS Device Requirements" for more information on SMS IP Indication.

1.4.1.5.3.15 **Factory Rest & Default APN values: Class 2** **Disable** VZ_REQ_LTEOTADM_7709

If the Class 2 APN has been disabled, and the device goes through a Factory Reset, the pre-Factory Reset default value of the `./ManagedObjects/ConnMO/LTE/APN/*/Setting/Operations` node ("currently set to enable") shall not be recovered. The Factor Reset value after Class 2 APN has been disabled shall be set to "disabled"

1.4.1.5.3.16 **Functionality for Data Retry Connectivity Management Objects** VZ_REQ_LTEOTADM_26496

- The device shall support for 3 new Connection Management Objects (`MAX_CONN_T`, `MAX_CONN`, and `WAIT_TIME`) as described below.
- The device shall not allow the End User access to these nodes via any method (For test case testing purposes, the device OEM shall provide a lab application to set values for these nodes manually on the device)
- The device shall allow the DM server to change the value of these new Nodes with a Replace command during a DM Session
- If a value is not received from the DM Server, the Device shall apply default value to these nodes as specified in the table above.
- Once a value is received from the DM server, the device shall apply that value to the nodes. This value shall not be reset back to default on power cycle or a factory reset or as part of an SU.
- If a value exists on the Device for these new nodes and the DM server sends new values, then the device shall overwrite old values with new values for appropriate nodes and shall not revert back to old values or the default values upon power cycle or a factory reset or as part of an SU.
- If an SU is designated to update the values of these nodes, then the device shall change the values of the appropriate nodes as provided in the SU. These overwritten values shall not be reset to default upon power cycle or factory reset or another SU.

1.4.1.5.3.17 **MAX_CONN_T** VZ_REQ_LTEOTADM_26500

- `MAX_CONN_T` node shall be of type Integer
- The value of this node represents the maximum number of elapsed seconds over which `MAX_CONN` is applied
- This node shall support a value within range 0 through 3600
- Default value of the node shall be 300

1.4.1.5.3.18 **MAX_CONN** VZ_REQ_LTEOTADM_26502

- ~~MAX_CONN node shall be of type Integer~~
- ~~The value of this node represents a Max counter for the number of PDN Connection attempts for a given APN within the MAX_CONN_T time~~
- ~~This node shall support a value within range 0 through 20~~
- ~~Default value of the node shall be 20~~

1.4.1.5.3.19 **WAIT_TIME** VZ_REQ_LTEOTADM_26505

- ~~WAIT_TIME node shall be of type Integer~~
- ~~The value of this node represents number of seconds the device shall wait before attempting to make another PDN Connection Attempt to an APN after disconnecting the PDN connection to that APN.~~
- ~~This node shall support a value within range 0 through 1023~~
- ~~Default value of the node shall be 0~~

1.4.1.5.3.20 **Factory Reset & Default APN values: Class 3** VZ_REQ_LTEOTADM_38539

Factory reset shall not change Class 3 settings to the default values.

1.4.1.6 **Configuration Update** VZ_REQ_LTEOTADM_7332288

Whenever any of the OMA-DM tree parameters such as APN Management or Connectivity Management parameters are updated on the device, the device shall be considered to have received a Configuration Update.

Whenever the device receives a Configuration Update and does not receive a software update, it shall store the date and time information when the Configuration was updated.

1.4.2 **SDM REQUIREMENTS** VZ_REQ_LTEOTADM_2409

~~The device shall allow for the use of OMA DM for parameter configuration as defined in this section. As per the OMA specification, SDM can refer to multiple Managed Objects (e.g. DCMO, LAWMO, DiagMon) and the associated manipulations. In this document,~~

VZW refers to SDM specifically about APN management, which is the manipulation of the ConnMO tree.

1.4.3 Firmware Over The Air (FOTA) VZ_REQ_LTEOTADM_37788

The device must support over the air software update. Open Access and Open Development device vendors may use their own FOTA system to update device software (firmware) over the air or use the Verizon Wireless FOTA system.

To obtain Verizon Wireless FOTA system information and technical specifications, contact VZW.FOTA-Services@VerizonWireless.com.

1.4.4 SUPPORT FOR INDUSTRY STANDARDS AND VERIZON WIRELESS REQUIREMENTS VZ_REQ_LTEOTADM_22991

1.4.4.1 OMA Defined Managed Objects VZ_REQ_LTEOTADM_7680

The Device shall implement the OMA ConnMO Object (Connectivity Management Object)

1.4.4.1.1 Update Result Reporting VZ_REQ_LTEOTADM_7681

All devices shall send a final DM notification message to the server following the update in accordance with OMA DM standards and the following requirements.

1.4.4.1.2 Update - Fatal Error VZ_REQ_LTEOTADM_7682

If the update process experiences a fatal error (i.e. checksum of final image invalid), the device shall reset.

1.5 DEVINFO SUBTREE EXTENSION VZ_REQ_MMOTADM_3103

1.5.1 ICCID Extended Node Support VZ_REQ_MMOTADM_8081

- In addition to the Dev Info node that is supported from the LTE OTADM and Reqs-OTADM Requirements documents, the device shall support ICCID extension node as described below

<i>DevInfo Nodes</i>	<i>Description</i>	<i>Value</i>	<i>Value Type</i>	<i>Commands</i>
1.5.1.1.1.1 .DevInfo/Ext/ICCID	UICCs ICCID Value	NULL or <ICCID> (See description below)	Char	Get

- ICCID Extension node is a Read Only node with Type Char. The Device shall not allow a Replace command from DM server on the ICCID Extension node. The Device shall be able to perform Read/Write operations on the ICCID Extension Node.
- This node shall be of Length 20 and shall only allow the following values:
 - NULL If UICC is not present in the Device or the Device is unable to reach the UICC due to some fault in the OS
 - This node shall only populate ICCID value retrieved from the UICC present in the device and only allow the following characters (0, 1, 2, 3, 4, 5, 6, 7, 8, or 9). Example: 8914812345678901234

1.5.2 Device Functionality VZ_REQ_MMOTADM_8083

- The Device shall attempt to read the value of ICCID everytime the Device is powered on
 - If a UICC is present and an ICCID value is retrieved, then the device shall check the existing value in the ICCID Extension Node. If the value is different than what is retrieved, then the retrieved value should be written in place of the pre-existing value
 - If a UICC is not present, then the device shall write a NULL in place of the ICCID Value.
- The Device shall make use of the available OS APIs to be able to listen for UICC Changes/Removal while device is powered on. If a UICC change/removal is detected, then the device shall use the following logic:

1. If UICC change is detected, then the Device shall retrieve the new ICCID value from the UICC and overwrite the existing value in the ICCID Extension node with the new Value
2. If a UICC removal is detected, then the Device shall overwrite the existing value with NULL

- The device shall report the ICCID Extension Node value during a Device Management Package 1 session along with all the other DevInfo node values. The device shall follow the rules specified above for value of ICCID Extension Node (NULL or actual ICCID value of a UICC in the Device).
- The Device shall not send any value other than what is described in this sub section for the ICCID extension node
- The Device shall not allow a Replace command from DM server on the ICCID Extension node.

1.6 INFORMATION AND USE CASES VZ_REQ_LTEOTADM_2410

1.6.1 APN CLASS USAGE - INFORMATIONAL VZ_REQ_LTEOTADM_2411

The following is for informational and clarification purposes only.

Each APN has an intended purpose or, equivalently, specified for a certain type of data or traffic type.

1.6.1.1 CLASS 1 (APN 1) VZ_REQ_LTEOTADM_23001

Class 1 APN is defined for IMS data and IMS transactions only. Class 1 APNs are not intended to be used for any other traffic type.

1.6.1.2 CLASS 2 (APN 2) VZ_REQ_LTEOTADM_23002

Class 2 APN is defined to support SIM-OTA server traffic and OTADM Server traffic. Class 2 is NOT intended to be used for any other type of traffic, except for SIM-OTA and OTADM traffic.

1.6.1.3 CLASS 3 (APN 3) VZ_REQ_LTEOTADM_23003

Class 3 APN is intended for services such as Internet and specific content services, such as those targeted to some destined server outside the VZW network. For example, an Enterprise may wish to utilize the Class 3 APN to force the device to attach to that Enterprises server services. Such services are controlled by the ADD flow described above. A customer of VZW, for example called Enterprise, may request VZW to change the Class APN (name) to a given value, for example www.enterprise.com. This is performed by the ADD flow, which would set the APN values of Class 3 to the required Enterprise customers parameter values.

1.6.1.4 CLASS 4 (APN 4) VZ_REQ_LTEOTADM_23004

Class 4 APN is intended only for applications that exchange data or are connecting to the VZW APP server.

1.7 REFERENCES VZ_REQ_LTEOTADM_2412

<Industry Standards References>

Change requests may cause modification to the specifications listed below. Please refer to www.3gpp.org for the latest version of the 3GPP specifications. Verizon Wireless LTE 3GPP Band 13 specifications are available at www.verizonwireless-opendevlopment.com.

1. Enabler Release Definition for OMA Device Management (based on SyncML DM), Version 1.1.2, December 9, 2003
2. IP Based Over-the-Air Device Management (IOTA-DM) for cdma2000 Systems, PN-3-0187, To be published as TIA-1059, January 14, 2005
3. The TLS Protocol Version 1.0, RFC 2246, January 1999
www.ietf.org/rfc/rfc2068.txt
4. Rivest, R., "The MD5 Message Digest Algorithm", RFC 1321, April 1992.
www.faqs.org/rfcs/rfc1321.html
5. A. Frier, P. Karlton, and P. Kocher, "The SSL 3.0 Protocol", Netscape Communications Corp., Nov 18, 1996.
6. OMA Device Management Bootstrap, Version 1.2 dated June 15, 2005.
http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050628-C/OMA-TS-DM-Bootstrap-V1_2-20050615-C.pdf
7. OMA Device Management Notification Initiated Session, Version 1.2 dated June 7, 2005.
http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050607-C/OMA-TS-DM-Notification-V1_2-20050607-C.pdf
8. OMA Device Management Protocol, Version 1.2 dated August 26, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050826-C/OMA-TS-DM-Protocol-V1_2-20050826-C.pdf

9. OMA Device Management Requirements Document, Version 1.2 dated June 7, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050607-C/OMA-RD-DM-V1_2-20050607-C.pdf
10. OMA Device Management Representation Protocol, Version 1.2 dated July 29, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050607-C/OMA-RD-DM-V1_2-20050607-C.pdf
11. OMA Device Management Security, Version 1.2 dated July 29, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050729-C/OMA-TS-DM-Security-V1_2-20050729-C.pdf
12. OMA Device Management Standardized Objects, Version 1.2 dated June 7, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050729-C/OMA-TS-DM-Security-V1_2-20050729-C.pdf
13. OMA Device Management Tree and Description, Version 1.2 dated June 15, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050729-C/OMA-TS-DM-Security-V1_2-20050729-C.pdf
14. OMA Device Management Tree and Description Serialization, Version 1.2 dated June 7, 2005. http://www.openmobilealliance.org/technical/release_program/docs/copyrightclick.aspx?pck=DM&file=V1_2-20050607-C/OMA-TS-DM-TNDS-V1_2-20050607-C.pdf
15. Verizon Wireless LTE 3GPP Band 13 Network Access Device Requirements
16. Verizon Wireless LTE SMS Device Requirements
17. Verizon Wireless LTE Data Retry Device Requirements
18. Verizon Wireless Compliance Test Plan LTE OTADM
19. The Hypertext Transfer Protocol Version 1.1, RFC 2068, June 1999
www.ietf.org/rfc/rfc2068.txt
20. WAP-230-WSP Specification
<http://www.openmobilealliance.org/tech/affiliates/LicenseAgreement.asp?DocName=/wap/wap-230-wsp-20010705-a.pdf>
21. WAP-259-WDP Specification
<http://www.openmobilealliance.org/tech/affiliates/LicenseAgreement.asp?DocName=/wap/wap-259-wdp-20010614-a.pdf>
22. Device Connectivity Management Object (DCMO) Specification
http://member.openmobilealliance.org/ftp/Public_documents/DM/DCMO/Permanent_documents/OMA-TS-DCMO-V1_0-20090902-D.ZIP
23. 3GPP TS 23.003: Technical Specifications Group Core Network and Terminals: Numbering, addressing and identification V9.0.0
24. The Internet Assigned Number Authority (IANA) Header Field Parameter Registry for the Session Initiation Protocol (SIP), RFC 3986,
<http://www.ietf.org/rfc/rfc3968.txt>